


TECHNICAL DATA

| | |
|---------------------|---|
| Light source | Philips Luxeon Rebel |
| Voltage | 110-250 V (50-60 Hz) |
| Safety class | Class I or II |
| Driver current | 280, 350, eller 500 mA |
| Power consumption | 75 - 138W (Avhengig av lumens pakke) |
| Dimming | 0 / 50 / 100 % |
| Luminaire flux | 7300-14.000 lm |
| Colour temperature | 4200 K (other color temperatures on request) |
| RA | >70 |
| Luminous efficiency | 100 lm/W |
| Lifetime | Min. 60.000 hours / up to 100.000 hours |
| Protection rating | IP66 |
| Temperature range | -30° to +60° C |
| Material | Housing: aluminium alloy Housing sealing: silicone, heat resistant Cover: PMA |
| Housing color | RAL 9006 (Other colors on request) |
| Weight | 7,21 kg / 8,5 kg |
| Dimensions (LxHxW) | 720 mm x 465 mm x 139 mm |



| Part nr. | Power consumption | Lumens | Driver | Kelvin |
|-----------|-------------------|--------|--------|--------|
| LSL901390 | 138W | 15.700 | 500 mA | 4200 |
| LSL901395 | 138W - Dimbar 50% | | | |
| LSL901040 | 107W | 12.900 | 400mA | 4200 |
| LSL901045 | 107W - Dimbar 50% | | | |
| LSL60930 | 97W | 10.800 | 350 mA | 4200 |
| LSL60935 | 97W - Dimbar 50% | | | |
| LSL60750 | 74W | 8.700 | 350 mA | 4200 |
| LSL60755 | 75W - Dimbar 50% | | | |

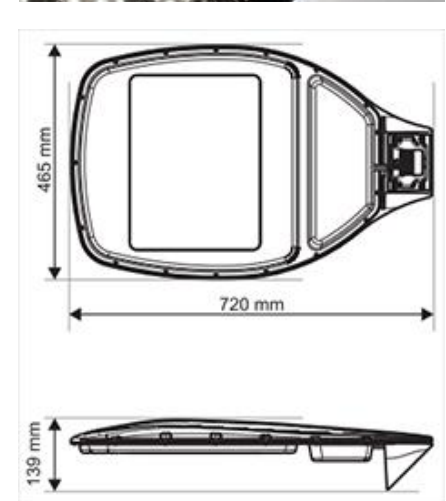