

T5 LED armatur

Enkel montering og kan kobles i serie.

Levetid: > 50.000 timer

Tilkobling: AC100-277V 50/60Hz

Kapslingsgrad: IP 20


Frontglass: Frostet eller klart glass

Fargetemperatur (kelvin):

Varm hvit - 3000K, Nøytral hvit - 4000K, Kald hvit - 5500K

Omgivelse temperatur for drift: -20°C to 40°C

Lysspredning: 120 grader

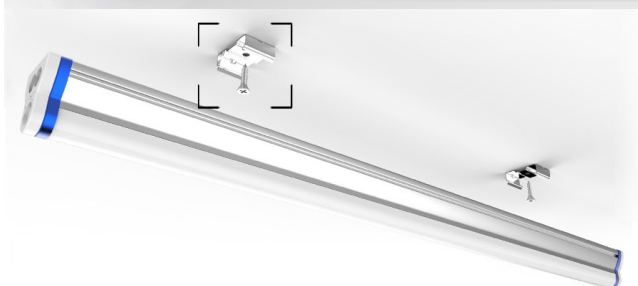

Standard Accessories

Modell oversikt:

Varenr	System effekt	Lumens (frosted glass)	Kelvin (k)	RA	Maks antall i serie	Lengde
T5-611	11W	1155 lm	3000/4000/5500	>80	20	600 mm
T5-917	17W	1755 lm	3000/4000/5500	>80	16	900 mm
T5-1220	20W	2100 lm	3000/4000/5500	>80	14	1200 mm
T5-1524	24W	2520 lm	3000/4000/5500	>80	12	1500 mm
T5-1530	30W	3150 lm	3000/4000/5500	>80	12	1500 mm

